



KB047AR0 / P5 TARGET

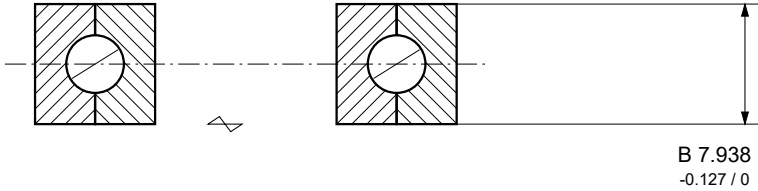

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 2:1; rolling elements and interfaces schematic.

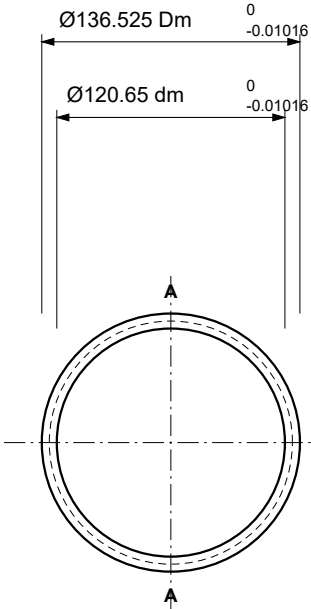

FRONT VIEW / Scale 0.25:1
Raceway and contact geometry schematic.

PROPOSED LIMITS / mm

Item / nominal	Lower / upper limit
Bore 120.65	120.63984 / 120.65
Outside 136.525	136.51484 / 136.525
Width B 7.938	7.811 / 7.938

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
Inner radial	7.62
Inner face	10.16
Outer radial	10.16
Outer face	12.7

Thin-section Class4 / ABEC5F candidate, not ISO P5 equivalence. Order limits require agreement.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: LYDL P5 acceptance limits: agree applicable thin-section precision system.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

KB047AR0 / P5 TARGET

LYDL-0950-P5-C

REV C | 2026-10-16 | UNIT mm | SCALE AS STATED

1 / 1

View series specifications

Contact LYDL