



XA140640N / P5 TARGET

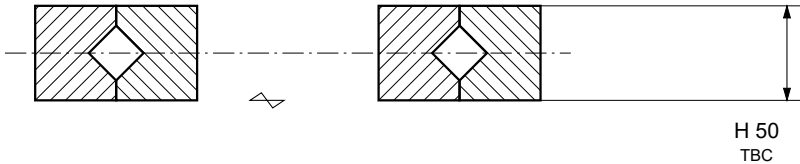

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

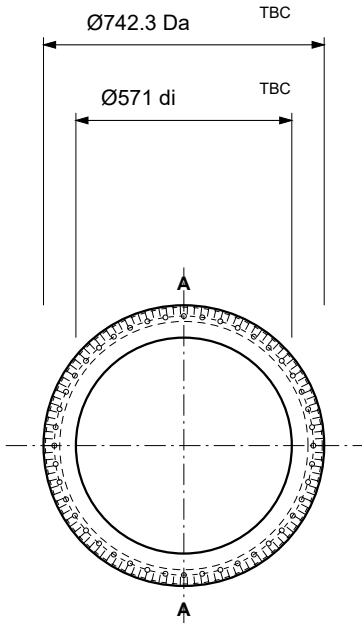

FRONT VIEW / Scale 0.05:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 571	TBC
Outside 742.3	TBC
Envelope H 50	TBC

ROTATIONAL LIMITS / μm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 44 x Ø13 THRU; PCD Ø685.
Other nominal dimensions: h 43, Li 595.
External gear: module 6, teeth 122, pitch_diameter 732, face_width 43. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: Inner-ring hole count/type not independently listed; outer na not copied to inner ring.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com

 Luoyang Deeplink Technology Co.,Ltd.	
XA140640N / P5 TARGET	LYDL-0500-P5-C
REV C 2026-10-16 UNIT mm SCALE AS STATED	1 / 1
View series specifications	Contact LYDL