



XA180309N / P5 TARGET

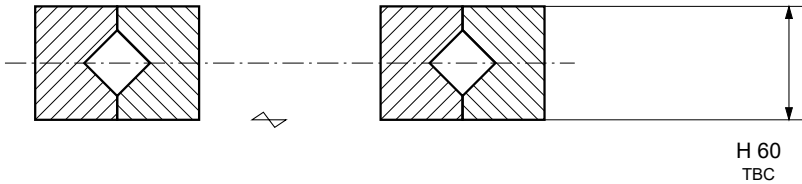

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

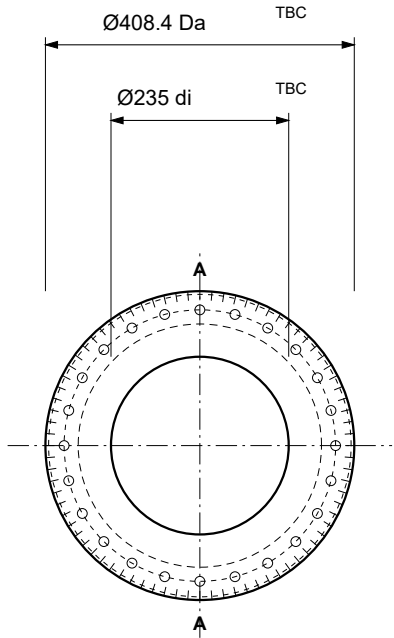

FRONT VIEW / Scale 0.1:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 235	TBC
Outside 408.4	TBC
Envelope H 60	TBC

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 24 x Ø13 THRU; PCD Ø359.
Other nominal dimensions: h 52.5, Li 259.
External gear: module 5, teeth 80, pitch_diameter 400, face_width 52.5. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: Inner-ring hole count/type not independently listed; outer na not copied to inner ring.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

XA180309N / P5 TARGET

LYDL-0504-P5-C

REV C | 2026-10-16 | UNIT mm | SCALE AS STATED

1 / 1

View series specifications

Contact LYDL