



XA220895N / P5 TARGET

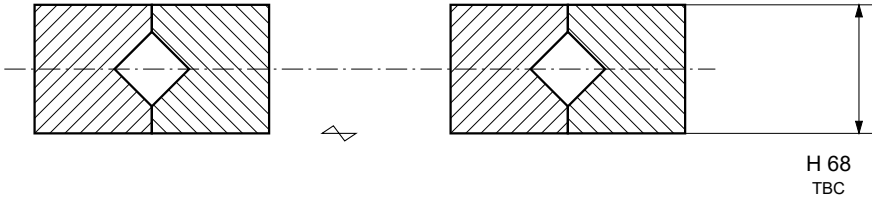

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

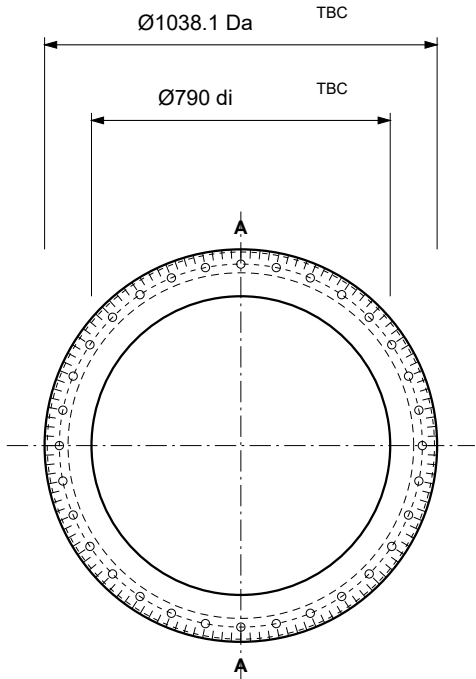

FRONT VIEW / Scale 0.05:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 790	TBC
Outside 1038.1	TBC
Envelope H 68	TBC

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 32 x Ø22 THRU; PCD Ø960.
Other nominal dimensions: h 61, Li 830.
External gear: module 8, teeth 128, pitch_diameter 1024, face_width 61. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: Inner-ring hole count/type not independently listed; outer na not copied to inner ring.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com

 Luoyang Deeplink Technology Co.,Ltd.	
XA220895N / P5 TARGET	LYDL-0508-P5-C
REV C 2026-10-16 UNIT mm SCALE AS STATED	1 / 1
View series specifications	Contact LYDL