



XA260475N / P5 TARGET

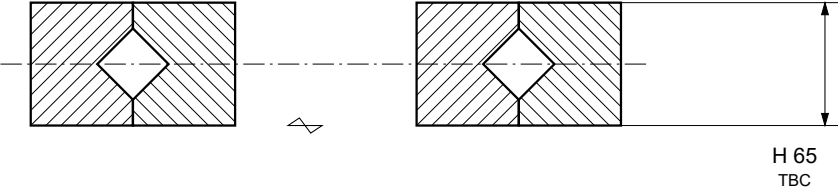

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

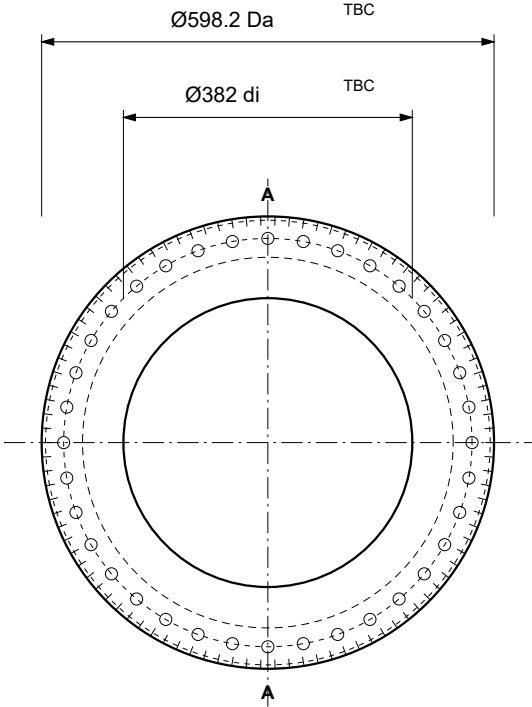

FRONT VIEW / Scale 0.1:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 382	TBC
Outside 598.2	TBC
Envelope H 65	TBC

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 36 x Ø16 THRU; PCD Ø540.
Other nominal dimensions: h 60, Li 410.
External gear: module 6, teeth 98, pitch_diameter 588, face_width 60. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: Inner-ring hole count/type not independently listed; outer na not copied to inner ring.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com

 Luoyang Deeplink Technology Co.,Ltd.	
XA260475N / P5 TARGET	LYDL-0511-P5-C
REV C 2026-10-16 UNIT mm SCALE AS STATED	1 / 1
View series specifications	Contact LYDL