



XA280995N / P5 TARGET

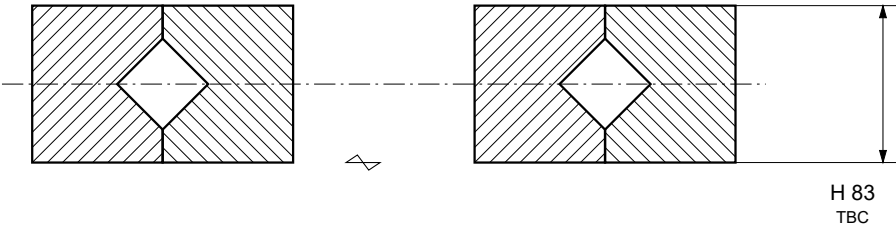

LOCAL SECTION A-A / AXIS GAP SHORTENED  
Local scale 0.25:1; rolling elements and interfaces schematic.

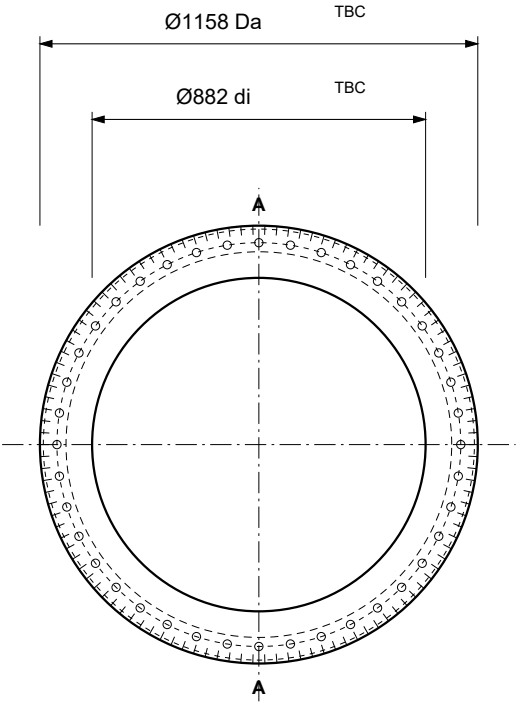

FRONT VIEW / Scale 0.05:1  
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

| Item / nominal | Lower / upper limit |
|----------------|---------------------|
| Bore 882       | TBC                 |
| Outside 1158   | TBC                 |
| Envelope H 83  | TBC                 |

ROTATIONAL LIMITS / µm MAX.

| Characteristic    | Limit |
|-------------------|-------|
| P5 radial / axial | TBC   |

Outer: 40 x Ø22 THRU; PCD Ø1068.  
Other nominal dimensions: h 73, Li 922.  
External gear: module 10, teeth 114, pitch\_diameter 1140, face\_width 73. Teeth shown symbolically.  
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: Inner-ring hole count/type not independently listed; outer na not copied to inner ring.

For higher precision grades or custom bearings, please contact:  
[sales@luoyangdeeplink.com](mailto:sales@luoyangdeeplink.com)

|                                                                                                                                   |                |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------|
|  <b>Luoyang Deeplink Technology Co.,Ltd.</b> |                |
| <b>XA280995N / P5 TARGET</b>                                                                                                      | LYDL-0514-P5-C |
| REV C   2026-10-16   UNIT mm   SCALE AS STATED                                                                                    | 1 / 1          |
| View series specifications                                                                                                        | Contact LYDL   |