



XI120288N / P5 TARGET

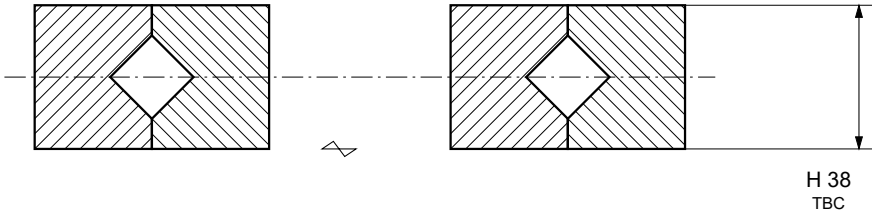

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.5:1; rolling elements and interfaces schematic.

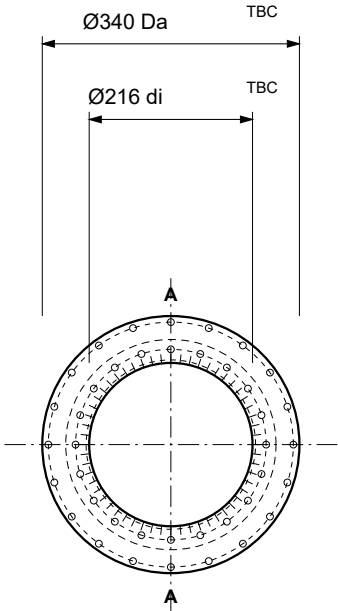

FRONT VIEW / Scale 0.1:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 216	TBC
Outside 340	TBC
Envelope H 38	TBC

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 20 x Ø9 THRU; PCD Ø324.
Inner: 20 x Ø9 THRU; PCD Ø252.
Other nominal dimensions: h 33, Di 289, da 287.
Internal gear: module 4, teeth 56, pitch_diameter 224, face_width 34. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: P5-specific rotational limits and dedicated locating fits.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

XI120288N / P5 TARGET

LYDL-0515-P5-C

REV C | 2026-10-16 | UNIT mm | SCALE AS STATED

1 / 1

View series specifications

Contact LYDL