



XI120420N / P5 TARGET

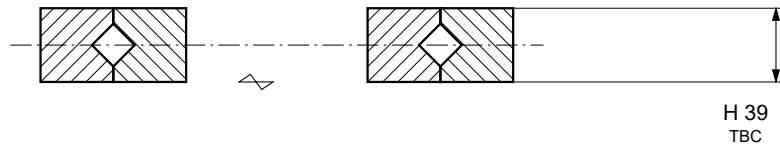

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

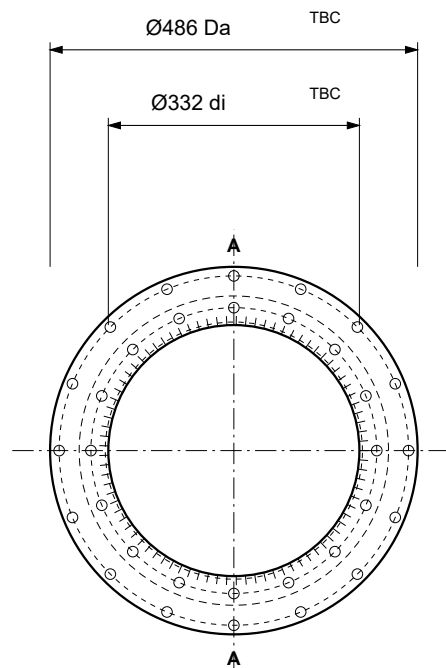

FRONT VIEW / Scale 0.1:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 332	TBC
Outside 486	TBC
Envelope H 39	TBC

ROTATIONAL LIMITS / μm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 16 x Ø14 THRU; PCD Ø462.
 Inner: 16 x Ø14 THRU; PCD Ø378.
 Other nominal dimensions: h 34, Di 421, da 419.
 Internal gear: module 4, teeth 85, pitch_diameter 340, face_width 34. Teeth shown symbolically.
 P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: P5-specific rotational limits and dedicated locating fits.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

XI120420N / P5 TARGET

LYDL-0516-P5-C

REV C	2026-10-16	UNIT mm	SCALE AS STATED
-------	------------	---------	-----------------

1 / 1

[View series specifications](#)

Contact LYDL