



XI160489N / P5 TARGET

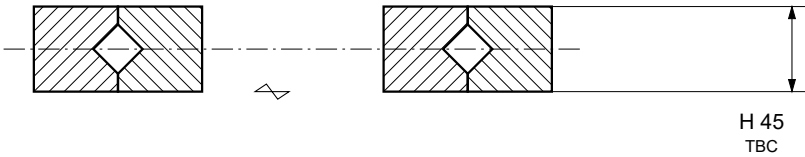

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

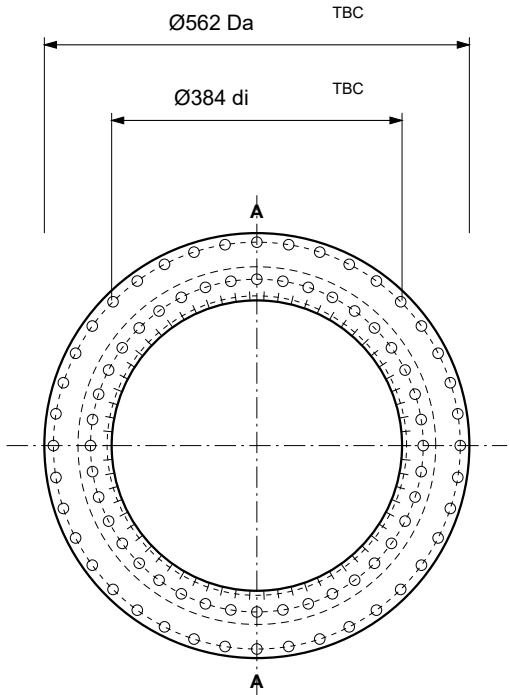

FRONT VIEW / Scale 0.1:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 384	TBC
Outside 562	TBC
Envelope H 45	TBC

ROTATIONAL LIMITS / μm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 40 x Ø14 THRU; PCD Ø538.
Inner: 40 x Ø14 THRU; PCD Ø440.
Other nominal dimensions: h 40, Di 490, da 488.
Internal gear: module 6, teeth 66, pitch_diameter 396, face_width 40. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: P5-specific rotational limits and dedicated locating fits.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

XI160489N / P5 TARGET

LYDL-0520-P5-C

REV C | 2026-10-16 | UNIT mm | SCALE AS STATED

1 / 1

View series specifications

Contact LYDL