



XI201100N / P5 TARGET

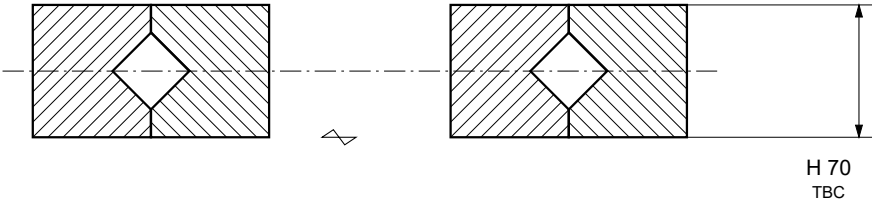

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

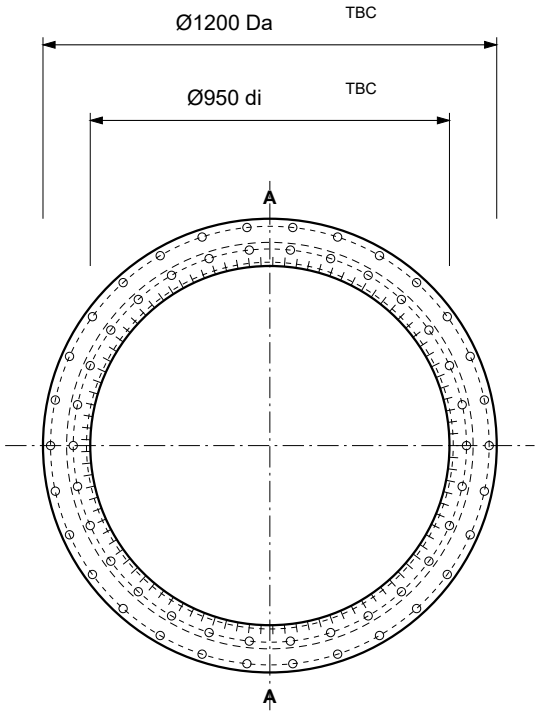

FRONT VIEW / Scale 0.05:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 950	TBC
Outside 1200	TBC
Envelope H 70	TBC

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 30 x Ø22 THRU; PCD Ø1160.
Inner: 30 x Ø22 THRU; PCD Ø1040.
Other nominal dimensions: h 54, Di 1101, da 1099.
Internal gear: module 10, teeth 97, pitch_diameter 970, face_width 60. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: P5-specific rotational limits and dedicated locating fits.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

XI201100N / P5 TARGET

LYDL-0524-P5-C

REV C | 2026-10-16 | UNIT mm | SCALE AS STATED

1 / 1

View series specifications

Contact LYDL