



XSA141094N / P5 TARGET

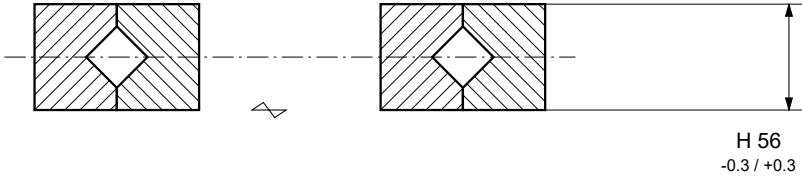

LOCAL SECTION A-A / AXIS GAP SHORTENED
Local scale 0.25:1; rolling elements and interfaces schematic.

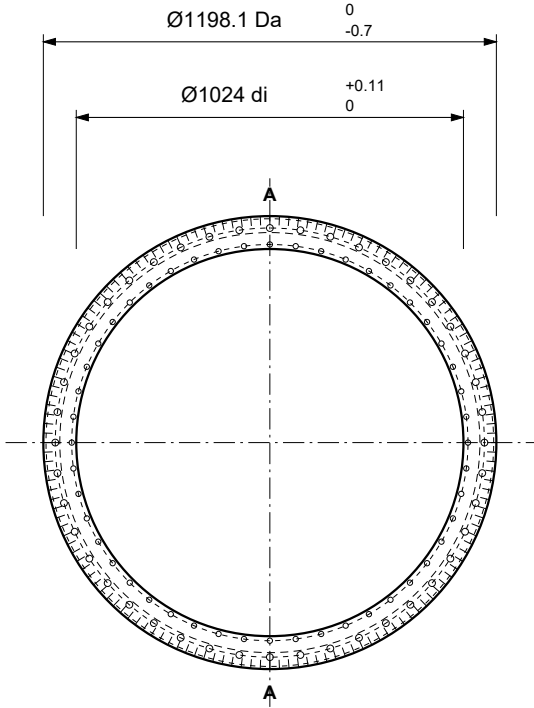

FRONT VIEW / Scale 0.05:1
Hole phase and tooth profile schematic.

DIMENSIONS AND LIMITS / mm

Item / nominal	Lower / upper limit
Bore 1024	1024 / 1024.11
Outside 1198.1	1197.4 / 1198.1
Envelope H 56	55.7 / 56.3

ROTATIONAL LIMITS / µm MAX.

Characteristic	Limit
P5 radial / axial	TBC

Outer: 44 x M12; PCD Ø1135.
Inner: 48 x Ø14 THRU; PCD Ø1048.
Other nominal dimensions: Di 1097, da 1093, h 44.5.
External gear: module 8, teeth 148, pitch_diameter 1184, face_width TBC. Teeth shown symbolically.
P5/P4 is the LYDL supply target. TBC items require model-specific limits; internal geometry is not a manufacturing definition.

Open: P5-specific rotational limits and dedicated locating fits.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com

 Luoyang Deeplink Technology Co.,Ltd.	
XSA141094N / P5 TARGET	LYDL-0561-P5-C
REV C 2026-10-16 UNIT mm SCALE AS STATED	1 / 1
View series specifications	Contact LYDL