



XV110 / P5 TARGET

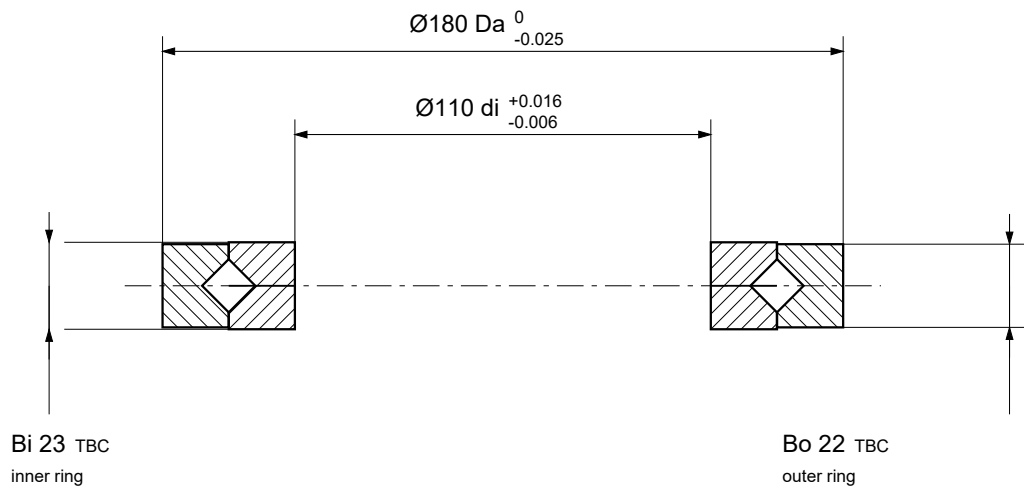

SECTION A-A / INTERNAL DETAILS SCHEMATIC
Scale 0.5:1; mounting holes omitted in section

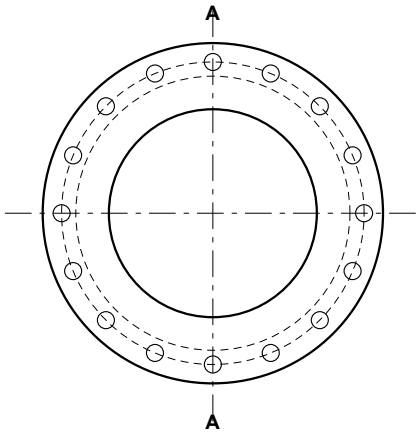

FRONT VIEW / Scale 0.25:1
Ring joint / raceway details are schematic.

BOUNDARY LIMITS / mm

Item	Lower / upper limit
Bore di	109.994 / 110.016
Outside Da	179.975 / 180.000
Inner width Bi	TBC
Outer width Bo	TBC

ROTATIONAL LIMITS / µm MAX.

Ring	Radial	Face
Inner	Not specified	Not specified
Outer	Not specified	Not specified

Outer ring: 16-Ø9 THRU, Ø15 CBORE depth 8.5; PCD Ø160.
Mounting reference / mm: ds 15.

Series-specific di J6 / Da h6 are shown. P5 rotational and ring-height limits remain to confirm.
di/Da are locating diameters; Bi/Bo denote individual ring heights.
Hole phase is schematic; position and thread tolerances are not defined here.

Open: XV locating steps and mounting dimensions need official drawing confirmation.

For higher precision grades or custom bearings, please contact:
sales@luoyangdeeplink.com



Luoyang Deeplink Technology Co.,Ltd.

XV110 / P5 TARGET

LYDL-0360-P5-C

REV C | 2026-10-16 | UNIT mm | SCALE AS SHOWN

1 / 1

View product specifications

Contact LYDL